




TRAIN UNLOADER



- Fully customizable to fit production needs
- High throughput capacity with minimal maintenance
- Discharge rates of 100 to 5,000 tph
- Dual Conveyors with independent conveyor drives
- Direct Drive with torque limiting devices
- Variable Frequency Drive and Direct Hydraulic Drive options
- Large bearings with protected seal arrangements
- Heavy duty conveyor decking with CCO throughout
- Corrosive resistant galvanized frame
- Shallow pit depth for lower excavation and construction cost

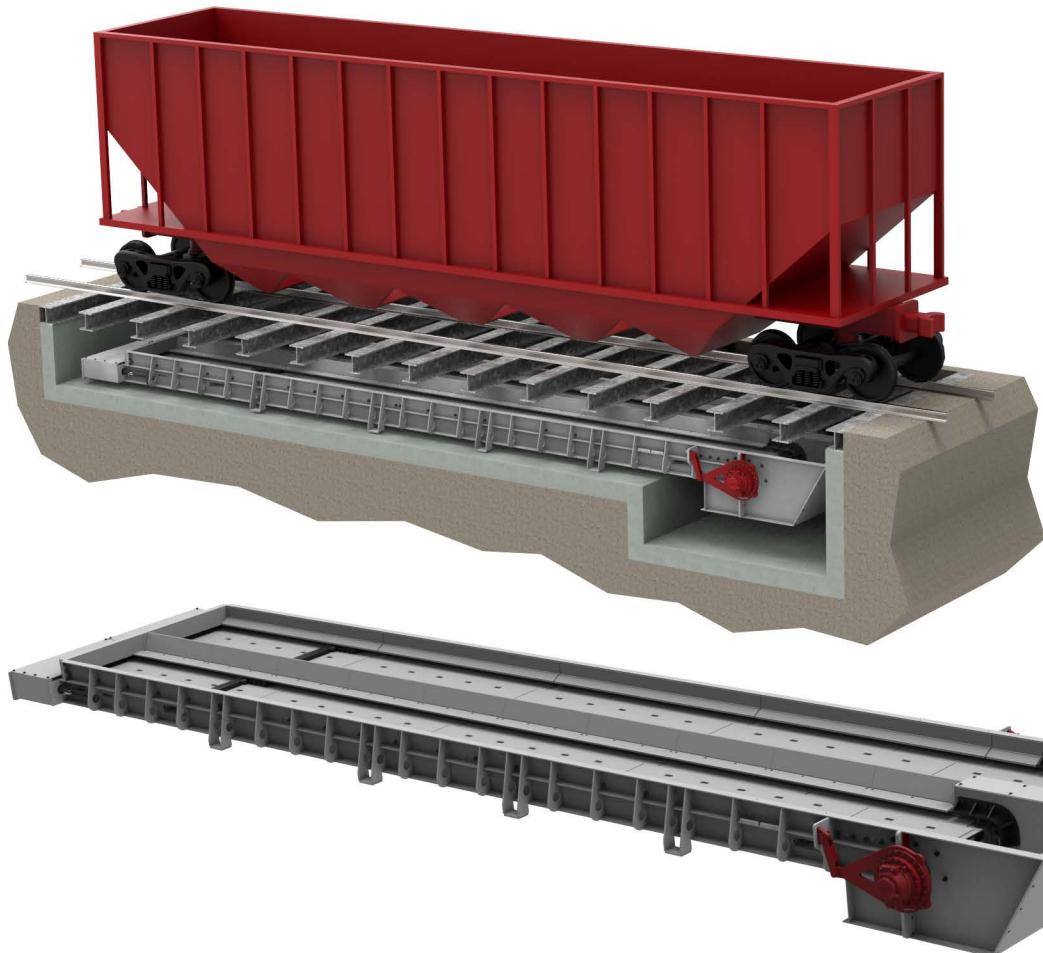